
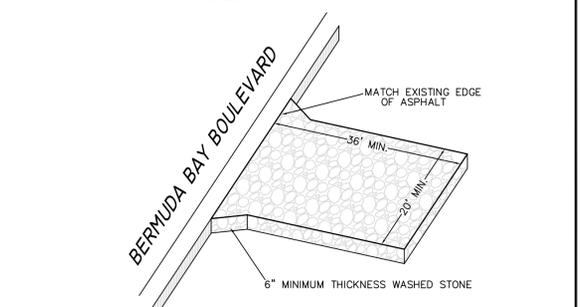


DIVISION FOR THE STATE OF NORTH CAROLINA & THE TOWN OF KILL DEVIL HILLS

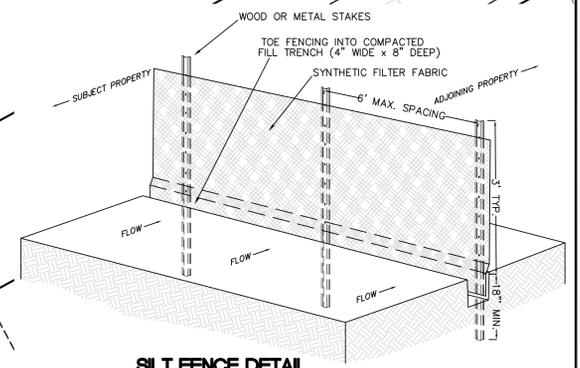

- TOWN OF KILL DEVIL HILLS ORDINANCE CHAPTER 153 - SECTION 153.071
Whenever land-disturbing activity is undertaken on a tract comprising more than 1/2 acre, the person conducting the land-disturbing activity shall install such sedimentation and erosion control devices and practices as are sufficient to retain the sediment generated by the land-disturbing activity within the boundaries of the tract during construction upon and development of said tract and shall plant or otherwise provide a permanent ground cover sufficient to restore erosion after completion of construction or development within 15 working days or 90 calendar days, whichever is shorter.
- MINIMUM EROSION CONTROL MEASURES:**
- SUBMIT SEDIMENTATION AND EROSION CONTROL PLAN ALONG WITH FINANCIAL RESPONSIBILITY FORM TO OBTAIN TOWN APPROVAL. APPROVAL REQUIRED BEFORE PROCEEDING WITH LAND DISTURBING ACTIVITIES. REFERENCE TOWN CODE 153.071 FOR ADDITIONAL INFORMATION.
 - INSTALL SILT FENCING IN LOCATIONS NOTED ON PLAN SHEET 7. USE METAL FENCE POSTS AND TRENCH IN TOE OF FENCING IN 6" MINIMUM FOR MAXIMUM EFFICIENCY AND DURABILITY.
 - INSTALL CONSTRUCTION ENTRANCE IN LOCATION AS SHOWN ON SHEET 7.
 - PLACE CLEAN TYPE 1 SAND FILL TO ELEVATIONS NOTED ON STORMWATER AND GRADING PLAN SHEET 2.
 - FILL SLOPES SHALL MAINTAIN 3:1 OR FLATTER.
 - INSTALL CONSTRUCTION ENTRANCE PAD AS DEPICTED ON STORMWATER PLAN. LOCATION MAY BE ADJUSTED TO MEET BUILDER'S NEEDS.
 - INSTALL FINAL STABILIZATION WITHIN 15 WORKING DAYS OF FINAL COMPLETION. FULL STABILIZATION MUST BE ACCOMPLISHED WITH 90 DAYS OF PROJECT COMPLETION.
 - IF THE PROJECT IS DELAYED INSTALL TEMPORARY STABILIZATION WITHIN 15 WORKING DAYS.
 - FINAL STABILIZATION SHALL BE BERMUDA SOID OR OUTER BANKS COMPATIBLE SEED BLEND. IRRIGATE AS REQUIRED TO ESTABLISH A VISIBLE STABILIZING CROP. SILT FENCING SHALL REMAIN IN PLACE UNTIL FULL STABILIZATION IS ACHIEVED.
 - INSPECT ALL SEDIMENTATION AND EROSION CONTROL MEASURES DURING CONSTRUCTION PARTICULARLY FOLLOWING SIGNIFICANT STORMWATER EVENTS. REPAIR ALL EROSION GULCHES ALONG WITH SILT FENCING IMMEDIATELY.
 - ADDITIONAL MEASURES MAY BE REQUIRED IF EXCESSIVE STORMWATER RUNOFF OR EROSION OCCURS PARTICULARLY THAT WHICH AFFECT ADJOINING PROPERTIES.

P.C.F. SL 247

MICHAEL W. ROBINSON, P.E., P.L.S.
ENGINEERING AND SURVEYING
KILL DEVIL HILLS, NC 27948
P.O. BOX 2852
HILLS, NC 27948
EMAIL: mrobinson@cbwengineering.com

SEDIMENTATION/EROSION CONTROL
NOT RELEASED FOR CONSTRUCTION



NO.	DATE	BY	REVISIONS
1	10-06-20	MWR	REVISED PER COMMENTS
2	11-03-20	MWR	ADD PHASING

PROJECT: **BERMUDA BAY - SOMERSET**
KILL DEVIL HILLS
DARE COUNTY
NORTH CAROLINA

BUILDING 201 AND 202-KDH REVIEW PLAN

DATE: 10-06-20 SCALE: 1"=40'
DESIGNED: MWR DRAWN: MWR
SHEET: **S8** OF **11**
CAD FILE: 3825001.DWG
PROJECT NO: 3825