


STANDARD CURB & GUTTER

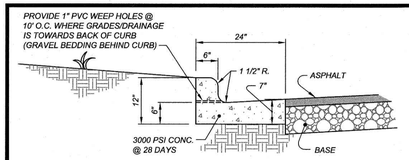


SPILL CURB & GUTTER

NOTES:

1. SCORE CURB / VALLEY GUTTER AT 15' O.C.
2. PROVIDE 1/2" EXPANSION JOINTS AT 90' O.C.
3. CONTRACTION JOINTS SHALL BE SPACED AT 10' INTERVALS. (A 15' SPACING WILL BE ALLOWED WHEN A MACHINE IS USED.)
4. FINISH ALL CONCRETE WITH CURING COMPOUND.

## 2'-0" STANDARD CURB AND GUTTER

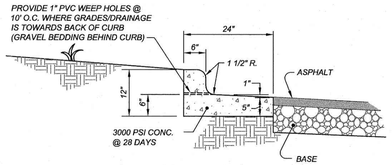


CATCHING CURB & GUTTER




SPILL CURB & GUTTER

NOTES:

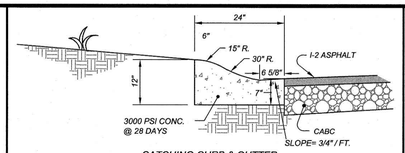1. SCORE CURB / VALLEY GUTTER AT 15' O.C.
2. PROVIDE 1/2" EXPANSION JOINTS AT 90' O.C.
3. CONTRACTION JOINTS SHALL BE SPACED AT 10' INTERVALS. (A 15' SPACING WILL BE ALLOWED WHEN A MACHINE IS USED.)
4. FINISH ALL CONCRETE WITH CURING COMPOUND.

## 2'-0" ROLLED CURB AND GUTTER




NOTE: ALL TRAFFIC ARROWS TO BE WHITE IN COLOR, MINIMUM FLOW RATE OF 100 SF PER GALLON (PAINT FEDERAL SPECIFICATION: TT-P-1952D)

## TRAFFIC ARROWS




## CONCRETE BOLLARD

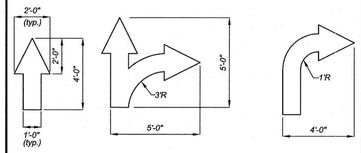


## NOSE DOWN CURB DETAIL




## TYPICAL FLUSH ADA CONCRETE SIDEWALK WITH DETECTABLE WARNING SURFACE ADJACENT TO HANDICAP PARKING

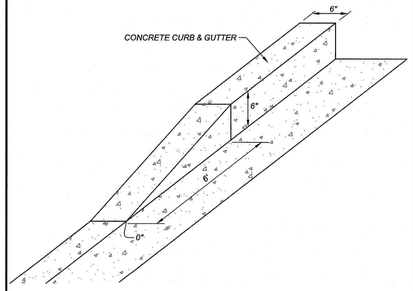


SUBGRADE AND GRAVEL BASE COMPACTED TO A MINIMUM 95% STANDARD PROCTOR MAXIMUM DRY DENSITY (ASTM D 698) REFER TO SOILS REPORT IF AVAILABLE.

NOTES:

1. CONTRACTOR SHALL OBTAIN SOILS REPORT IF AVAILABLE, AND ADJUST PAVEMENT SECTIONS ACCORDINGLY.

## CONCRETE PAVEMENT DETAIL




PARKING STALL ASPHALT PAVEMENT




TRAFFIC AISLE ASPHALT PAVEMENT

NOTES:

1. CONTRACTOR SHALL OBTAIN SOILS REPORT, IF AVAILABLE, AND ADJUST PAVEMENT SECTIONS ACCORDINGLY.
2. CONTRACTOR SHALL PLACE BINDER COURSE DURING CONSTRUCTION, THEN PLACE SURFACE COURSE AFTER BUILDING AND SITE CONSTRUCTION.
3. SUBGRADE COMPACTED TO A MINIMUM 98% STANDARD PROCTOR MAXIMUM DRY DENSITY (ASTM D 698) REFER TO SOILS REPORT IN NOTE ABOVE.

## ASPHALT PAVEMENT DETAIL




## CONCRETE WHEEL STOP




CONSTRUCTION JOINT




EXPANSION JOINT




SLAB EDGE

## CONCRETE SLAB DETAIL




## ASPHALT/CONCRETE TRANSITION




## GATE LATCH DETAILS




NOTES:

1. DRAINAGE FLUME SHALL EXTEND DOWN TO THE EXISTING DROP INLET.
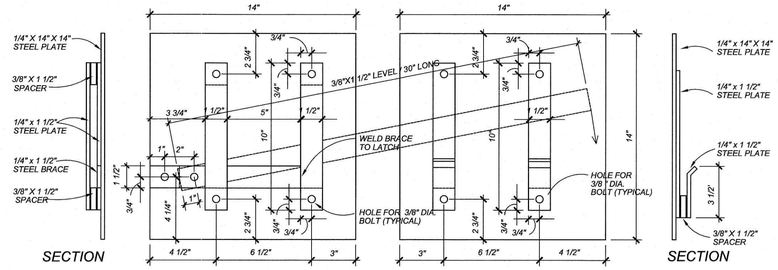
## CONCRETE OUTLET FLUME

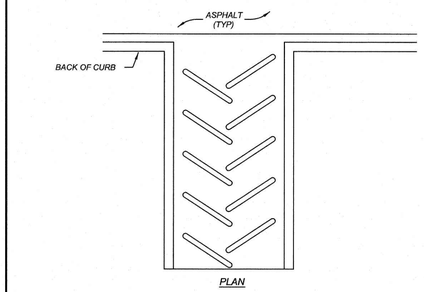


## TYPICAL FRONT ELEVATION

(SEE GATE DETAIL)




## WALL SECTION

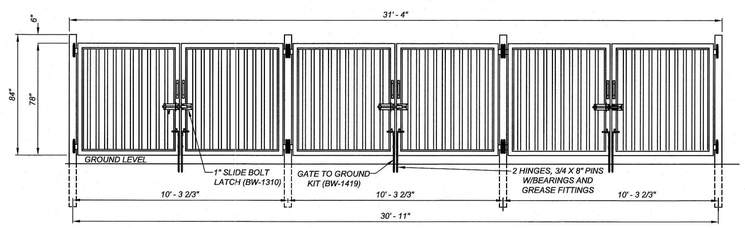


## PLAN VIEW

## DUMPSTER ENCLOSURE DETAIL

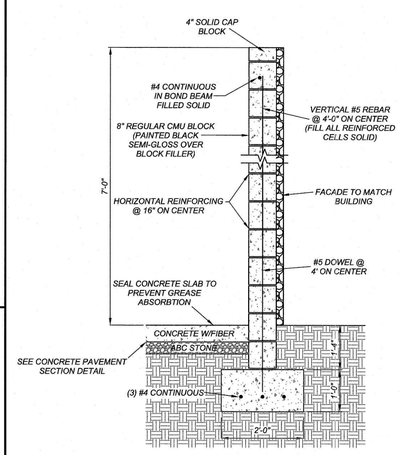811

Know what's below.
Call before you dig.
nc811.org or 1-800-632-4949

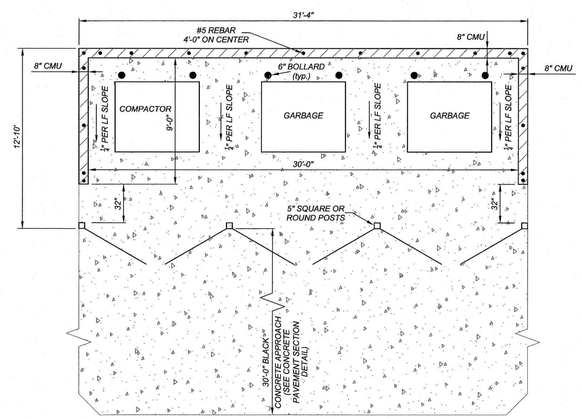24 HOUR CONTACT
JOHN ARMFIELD
CONSTRUCTION MANAGER
TELEPHONE: (336) 279-3242

REVISIONS

| NO. | DATE | DESCRIPTION | BY |
|---|---|---|---|
| 1 | 10-26-20 | TOWN COMMENTS | DDH |


COMMERCIAL SITE DESIGN
8312 CREEDMOOR ROAD
RALEIGH, NORTH CAROLINA 27613
(919) 848-6721, FAX: (919) 848-3741
WWW.CSITEDESIGN.COM


CLIENT/OWNER:
COOK OUT
15 LAURA LANE, SUITE 300
THOMASVILLE, NC 27360
TELEPHONE: (336) 215-7025
FAX: (336) 474-1849

COOK OUT
FRESH HAMBURGERS
2005 S CROATAN HIGHWAY
KILL DEVIL HILLS, NORTH CAROLINA

DETAILS

| | |
|---|---|
| PROJECT NO. | OUT-2022 |
| FILENAME: | OUT2022-DTL1 |
| DRAWN BY: | DDH |
| SCALE: | N.T.S. |
| DATE: | 09-04-2020 |
| SHEET NO. | C-5 |

X:\OUT - Cookout\2022- Kill Devil Hills, NC\CAD\OUT2022-DTL1.dwg, 11/3/2020 12:08:13 PM, chrisn