


P.C.F. SL 247

MICHAEL W. ROBINSON, P.E., P.L.S.
ENGINEERING AND SURVEYING
 KILL DEVIL HILLS, NC 27948
 P.O. BOX 2852
 HILLS, NC 27948
 EMAIL: mrobinson@cbseengineering.com

SEDIMENTATION/EROSION CONTROL
 NOT RELEASED FOR CONSTRUCTION


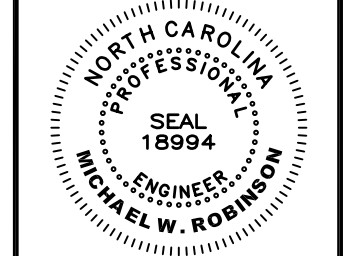


REVISIONS	
NO.	DATE
1	10-06-20
2	11-03-20

PROJECT: BERMUDA BAY - SOMERSET
 NORTH CAROLINA
 DARE COUNTY
 KILL DEVIL HILLS

BUILDING 201 AND 202-KDH REVIEW PLAN

DATE: 10-06-20 SCALE: 1"=40'
 DESIGNED: MWR DRAWN: MWR
 SHEET: S8 OF 11
 CAD FILE: 3825001.DWG
 PROJECT NO: 3825

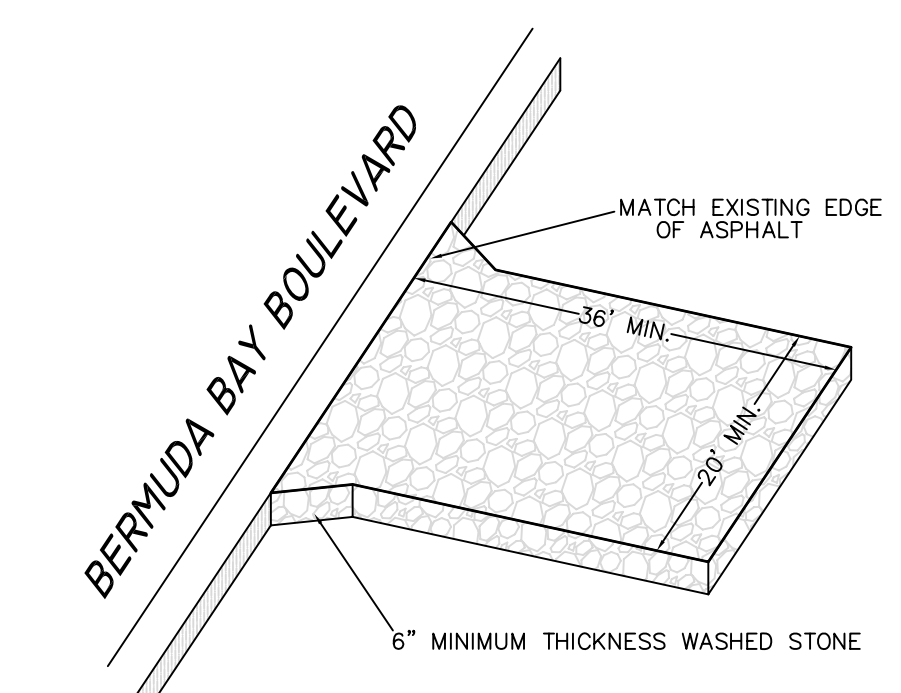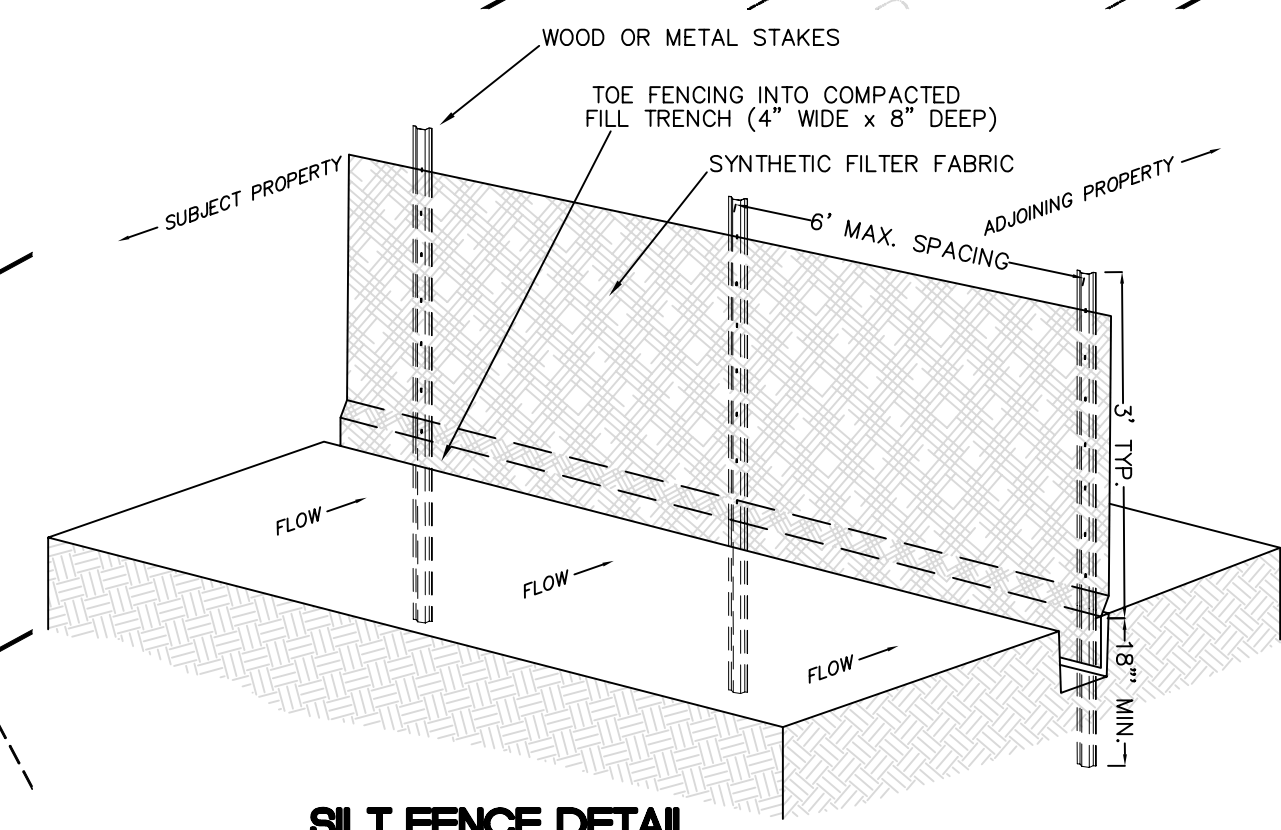

TOWN OF KILL DEVIL HILLS ORDINANCE CHAPTER 153 - SECTION 153.071
 Whenever land-disturbing activity is undertaken on a tract comprising more than 1/2 acre, the person conducting the land-disturbing activity shall install such sedimentation and erosion control devices and practices as are sufficient to retain the sediment generated by the land-disturbing activity within the boundaries of the tract during construction upon and development of said tract and shall plant or otherwise provide a permanent ground cover sufficient to restore erosion after completion of construction or development within 15 working days or 90 calendar days, whichever is shorter.

MINIMUM EROSION CONTROL MEASURES:

- SUBMIT SEDIMENTATION AND EROSION CONTROL PLAN ALONG WITH FINANCIAL RESPONSIBILITY FORM TO OBTAIN TOWN APPROVAL. APPROVAL REQUIRED BEFORE PROCEEDING WITH LAND DISTURBING ACTIVITIES. REFERENCE TOWN CODE 153.071 FOR ADDITIONAL INFORMATION.
- INSTALL SILT FENCING IN LOCATIONS NOTED ON PLAN SHEET 7. USE METAL FENCE POSTS AND TRENCH IN TOE OF FENCING IN 6" MINIMUM FOR MAXIMUM EFFICIENCY AND DURABILITY.
- INSTALL CONSTRUCTION ENTRANCE IN LOCATION AS SHOWN ON SHEET 7.
- PLACE CLEAN TYPE 1 SAND FILL TO ELEVATIONS NOTED ON STORMWATER AND GRADING PLAN SHEET 2.
- FILL SLOPES SHALL MAINTAIN 3:1 OR FLATTER.
- INSTALL CONSTRUCTION ENTRANCE PAD AS DEPICTED ON STORMWATER PLAN. LOCATION MAY BE ADJUSTED TO MEET BUILDER'S NEEDS.
- INSTALL FINAL STABILIZATION WITHIN 15 WORKING DAYS OF FINAL COMPLETION. FULL STABILIZATION MUST BE ACCOMPLISHED WITH 90 DAYS OF PROJECT COMPLETION.
- IF THE PROJECT IS DELAYED INSTALL TEMPORARY STABILIZATION WITHIN 15 WORKING DAYS.
- FINAL STABILIZATION SHALL BE BERMUDA SOID OR OUTER BANKS COMPATIBLE SEED BLEND. IRRIGATE AS REQUIRED TO ESTABLISH A VISIBLE STABILIZING CROP. SILT FENCING SHALL REMAIN IN PLACE UNTIL FULL STABILIZATION IS ACHIEVED.
- INSPECT ALL SEDIMENTATION AND EROSION CONTROL MEASURES DURING CONSTRUCTION PARTICULARLY FOLLOWING SIGNIFICANT STORMWATER EVENTS. REPAIR ALL EROSION GULCHES ALONG WITH SILT FENCING IMMEDIATELY.
- ADDITIONAL MEASURES MAY BE REQUIRED IF EXCESSIVE STORMWATER RUNOFF OR EROSION OCCURS PARTICULARLY THAT WHICH AFFECT ADJOINING PROPERTIES.



DIVISION FOR THE STATE OF NORTH CAROLINA
 & THE TOWN OF KILL DEVIL HILLS